


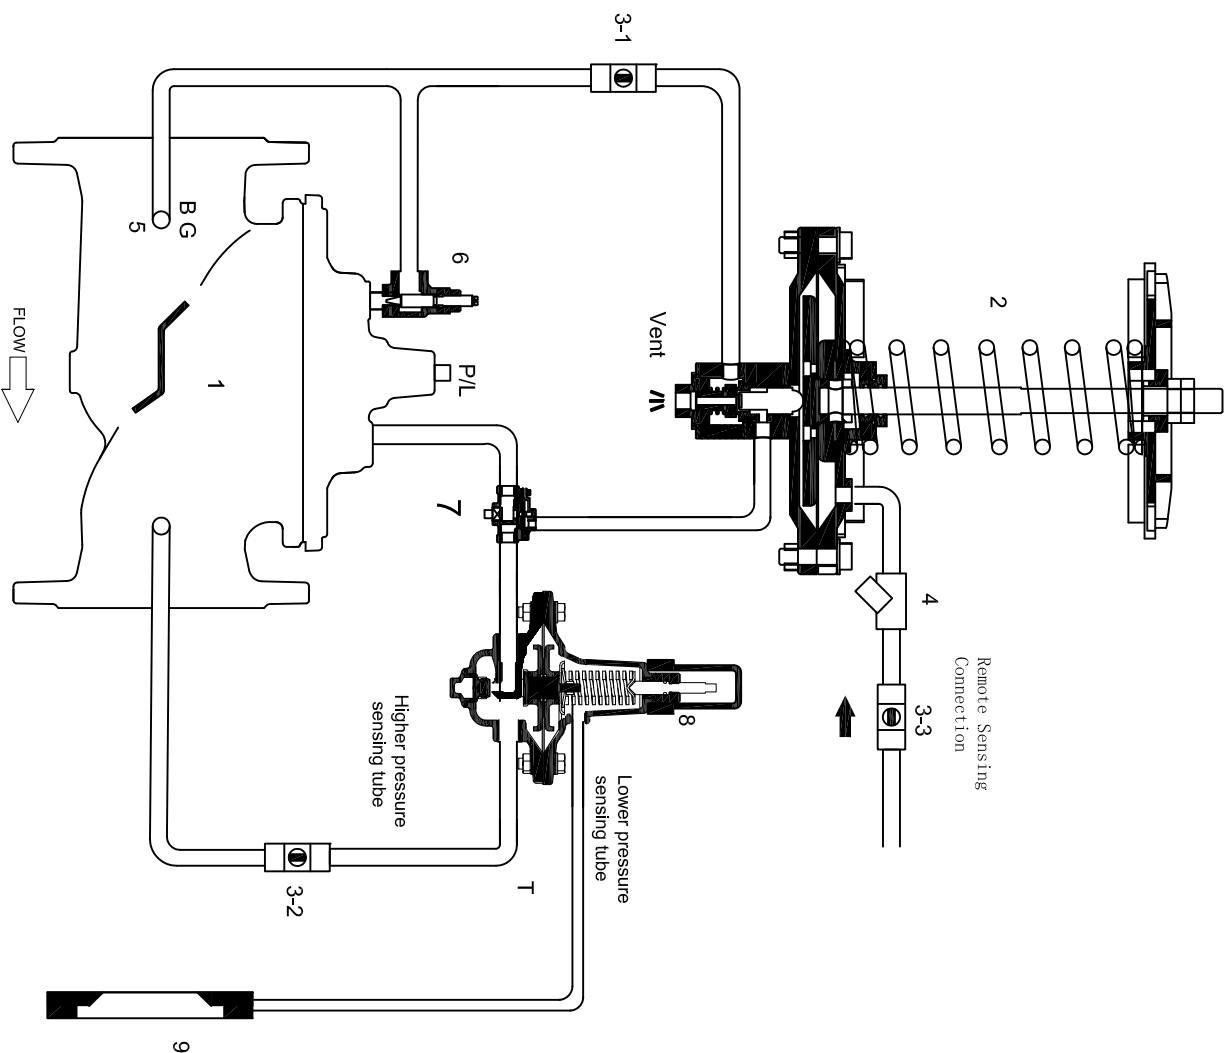

- Note:**
1. Test:
 - 1.1 Sealing test
Low pressure: 0.5bar;
High pressure: 1.1xPN bar;
 - 1.2 Shell test
1.5xPN bar
 2. Flange dimension according to order;
 3. If need optional material or others, consult factory.

OPTION & ACCESSORIES

NO.	Part Name	Standard
1	Main Valve	GJS 500-7
2	Altitude control Pilot	SUS304
3	Ball Valve	SUS304
4	Y Strainer	SUS304
5	Strainer	SUS304
6	Needle Valve	SUS304
7	Accelerator	SUS304
8	P400 Flow control Pilot	SUS304
9	Orifice	1040+SUS304

A14A Flow control & Altitude control valve	SE-AFC-BS-ASS-A14A-V1
Suzhou Alpine Flow Control Co., Ltd.	2020.4.22