


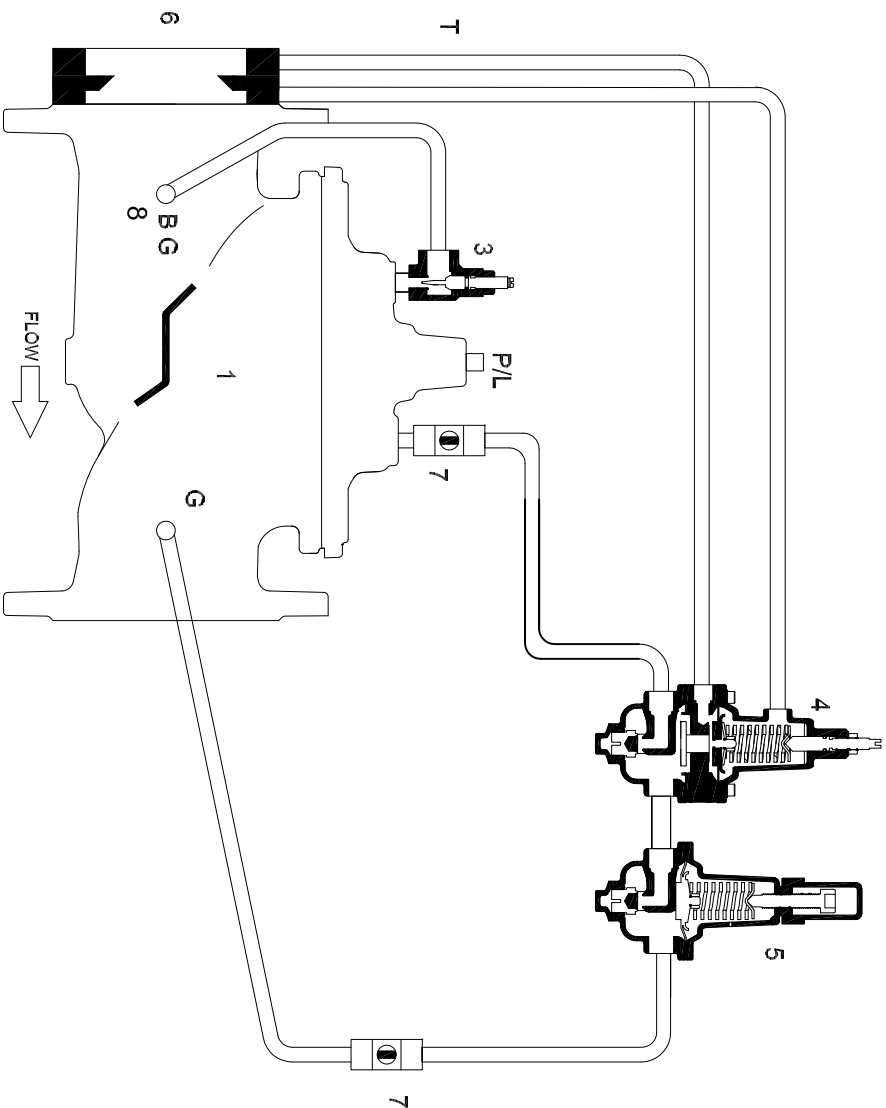

OPTION & ACCESSORIES

- B Ball valve
- G Pressure gauge
- P Position Indicator
- L Limit switch

- Note:
- 1. Test:
 - 1.1 Sealing test
 - Low pressure: 0.5bar;
 - High pressure: 1.1xPN;
 - 1.2 Shell test
 - 1.5xPN
 - 2. If need optional material or others, consult factory.

NO.	Part Name	☐ Standard
1	Main Valve	GJS 500-7
2	Restriction	SUS304
3	Needle Valve	SUS304
4	Flow control Pilot	SUS304
5	Pressure Reducing Pilot	SUS304
6	Orifice	1040+SUS304
7	Ball Valve	SUS304
8	Strainer	SUS304
T	Tube	SUS304

Flow control +Pressure Reducing Valve	SE-AFC-A204-50-600-EN-V1
Suzhou Alpine Flow Control Co.,Ltd.	2022.4.29