Sewage Air Release Valve With Chamber



General Applications:

For sewage system.

Technical Data:

Size Range:DN 50

Pressure rating:PN1 0 ,PN16. Max. temperature Range: -10°C to 80°C KAS with valve chamber-provide the proper solution for those locations requiring cost saving, frost protection, installation under roads, pavements, buildings. The air valve will ensure the proper operation of sewage lines allowing the release of air pockets during working conditions, the evacuation and the entrance of large volumes of air during filling and draining operations.





<u>1</u>6 Main Valve-DN50 A2 (8) 9 \bigcirc -10 6 5 -11 15 12 (4) н 13 3 P 2 14 E-E n E 7 1 17 DN A1

Parts List

	i		·	
No.	Part Name	Material	Standard	
1	Body	Ductile Iron	EN GJS 500-7	
2	Float	Stainless Steel	AISI 316	
3	Middle Part	Ductile Iron	EN GJS 500-7	
4	O-Ring	Rubber	NBR	
5	Hex Bolt	Stainless Steel	AISI 316	
6	Washer	Stainless Steel	AISI 316	
7	Bonnet	Ductile Iron	EN GJS 500-7	
8	Screw	Ductile Iron	EN GJS 500-7	
9	O-Ring	Rubber	NBR	
10	Seat	Rubber	NBR	
11	Sealing Arc	Stainless Steel	AISI 316	
12	Nozzle Seat	Rubber	NBR	
13	Stem	Stainless Steel	AISI 316	
14	Small Nozzle	Stainless Steel	AISI 316	
15	Guide Barrel	Stainless Steel	AISI 316	
16	Plug	Stainless Steel	AISI 316	
17	Butterfly ball valve	Stainless Steel	AISI 316	




Dimension

Unit: MM

Dimension								
DN	A1	A2	A3	С	H1	Н		
50	G2"	G2"	BSPT3/8"	25	48	333.5		


BIG NOZZLE EXHAUSTING / INTAKE

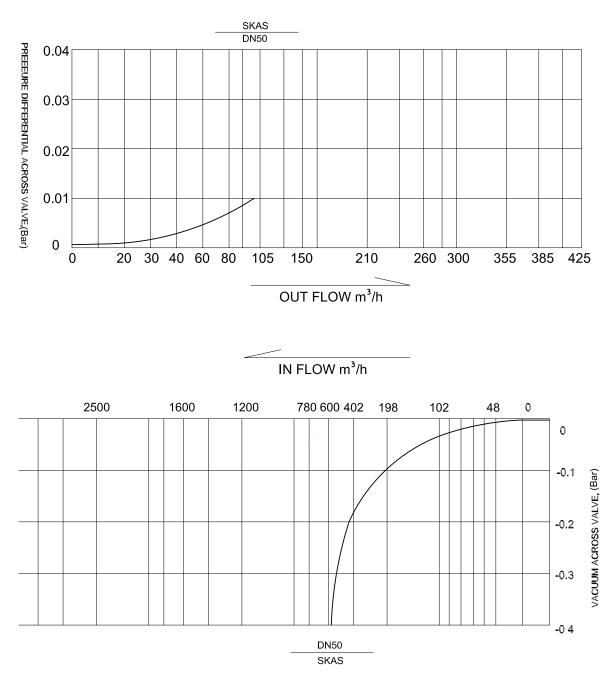

* AFC keeps the right to change dimension without further notice.





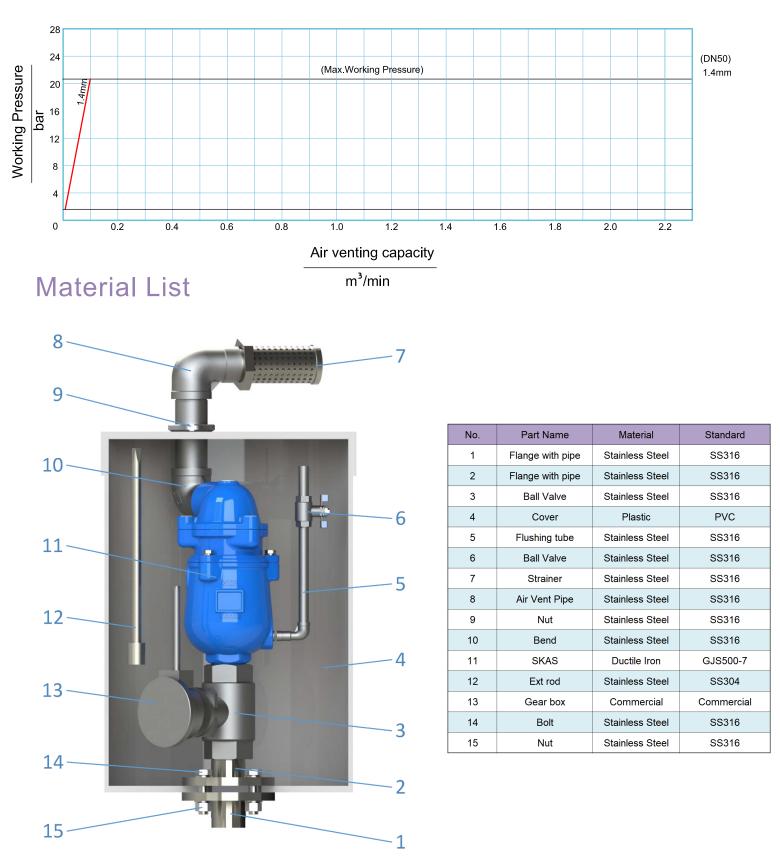



[™]Copy right by Alpine Flow Control (Suzhou) Co.,Ltd ST-EN/1008/ STD 01/ 2/2 <u>AF</u>C reserves the right to change design/ specifications without further notices.